



FLOORING BY
OAKLEGENDS
WATERPROOF FLOOR COVERING





FLOORING BY OAKLEGENDS

WATERPROOF FLOOR COVERING

Oak Legends mimics the rich textures of natural elements, seamlessly bringing the outdoors in. A popular choice for homeowners who want the aesthetic of wood or stone without the maintenance requirements. As for the installation, a simple click-lock system allows for a straightforward fitting process without the need for adhesives.

Embrace a flooring solution that harmonises style with functionality, offering a reliable foundation for years to come.

PLEASE NOTE

Product appearance throughout this brochure may vary slightly to the physical product. Due to printing limitations, slight product colour variations may occur between production batches. To ensure consistency across panels, we suggest ordering the full quantity required at the same time.

scan to visit our website



www.ffbg.co.uk



Tummel Oak Planks



*Easy installation
& style!* the practical
& durable choice



Staffa Graphite Concrete Tiles



Morar Oak Planks

Why use

Stone Plastic Composite (SPC)

Impressive Durability

SPC flooring boasts remarkable durability – a tough contender against dents, scratches, and stains. It's a pragmatic choice for high traffic areas, providing a long-lasting solution that minimises the need for frequent maintenance.


Waterproof Assurance

It's inherent waterproof qualities make it suitable for areas prone to moisture, such as bathrooms and kitchens. This alone, sets it apart from traditional hardwood flooring.

Versatility

Known for its versatility in design, SPC flooring can replicate the appearance of various natural materials. Making it a popular choice for homeowners who want the aesthetic of wood or stone without the maintenance requirements.

What is SPC made of?

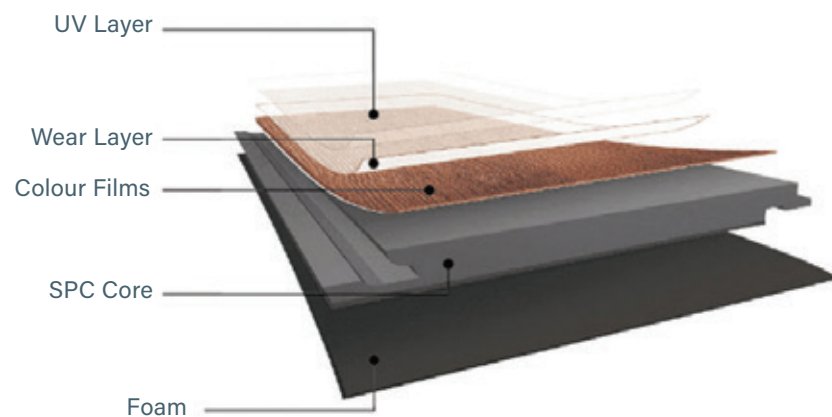

The core of SPC flooring is composed of a mixture of natural limestone powder, polyvinyl chloride (PVC), and stabilisers.


Materials specifically chosen for their strength, stability, and water resistance.

100% waterproof
Perfect for
Kitchen's & Bathrooms

Morar Oak Planks

Choose your style


Oak Legends flooring is available in 3 varieties, allowing you to find the style that best matches your interior & personality!



Create a unique & personalised design.



A popular choice for upscale or traditional settings.



A classic and timeless look in any space.

MOSAIC - TILES


610 x 305mm x 6.15mm - 2.05sqm per pack



Crovie



Luss

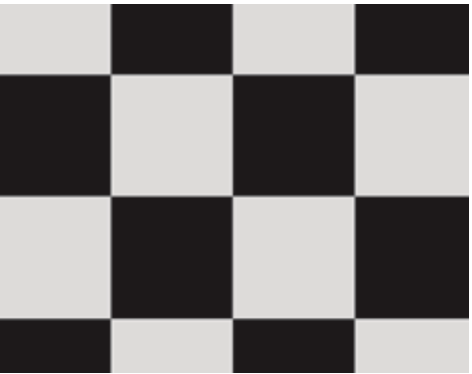

Machrie



Plockton



Portnahaven



Portree




Pittenweem



Ranza

LEAF - TILES


610 x 305mm x 5mm - 2.05sqm per pack

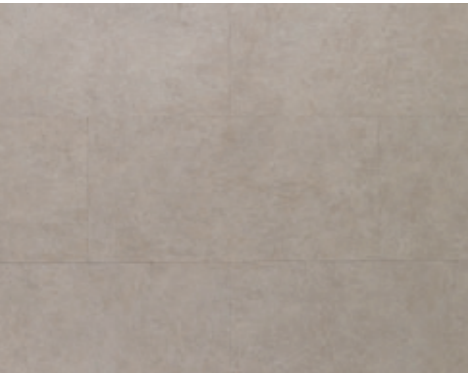

Arran Natural Stone



Canna Grey Slate

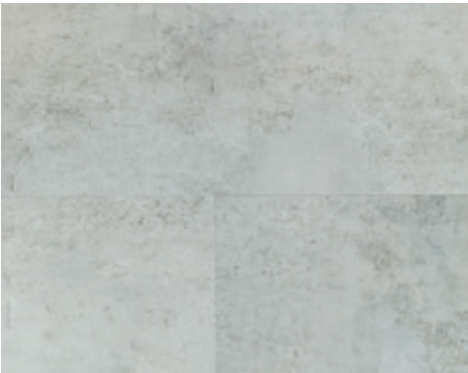

Eriskay Light Stone



Grey Black Concrete




Islay Grey Quartz



Jura Carrara Marble



Mull Grey Concrete

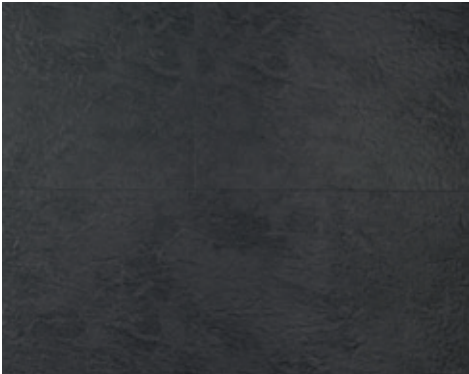

Orkney Oil Black Slate



Raasay Beige Concrete



Shetland Black Slate




Staffa Graphite Concrete



Tiree Black Slate

FOREST - PLANKS

1220 x 181mm x 5mm - 2.2sqm per pack

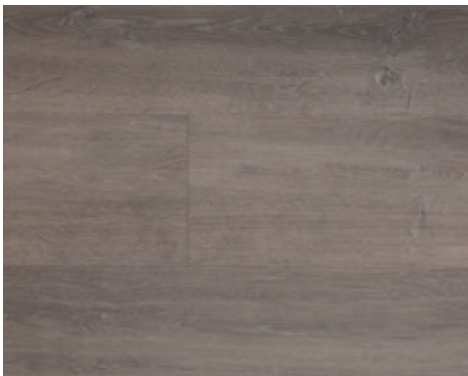

Ard Oak



Arklet Oak




Carron Oak



Doon Oak



Ferna Oak

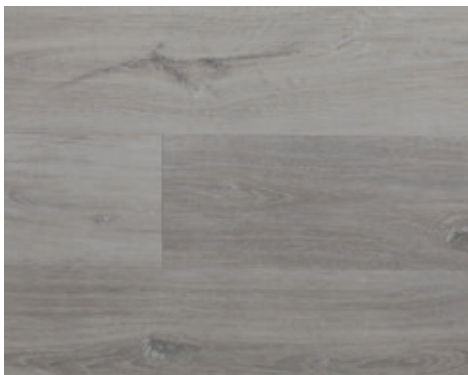


Fyne Oak



Katrine Oak



Kilconquhar Oak

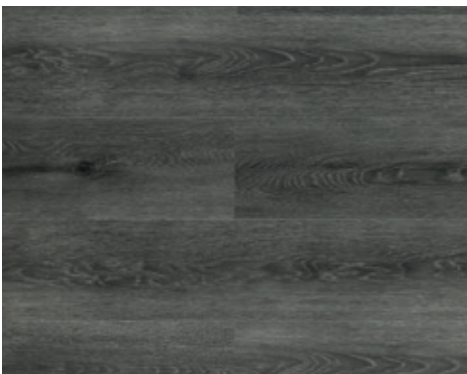

Linnhe Oak



Long Oak



Morlich Oak



Morar Oak



Rannoch Elm




Tarbet Oak




Tummel Oak

HERRINGBONE

635 x 127mm x 6mm - 1.7sqm per pack

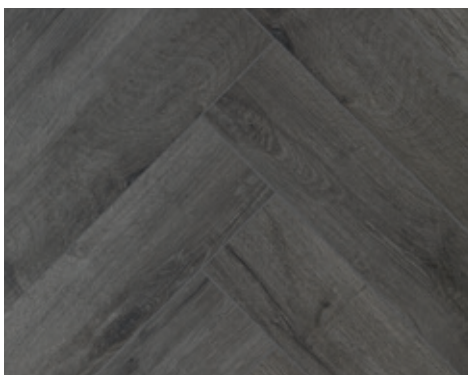

Carron Oak

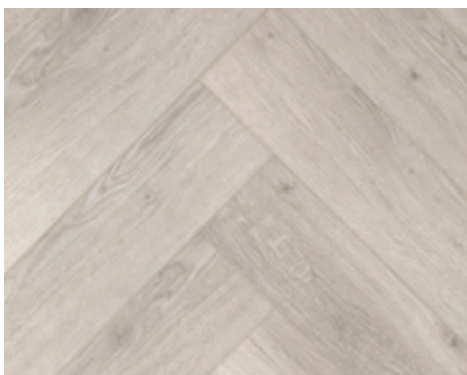

Faolinn Oak



Leven Oak




Morlich Oak




Tarbet Oak


That natural look
without the expense!

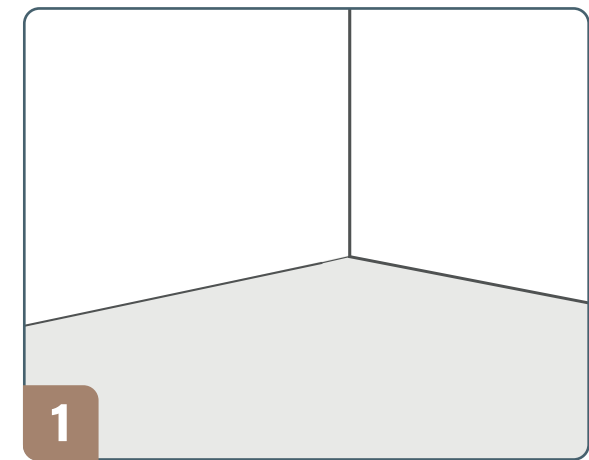


Prepare the area for installation. Ensure the surface is clean, dry, flat and even. You may need to prepare the floor using plywood sheets or a concrete screed. Plan the installation by measuring the room dimensions and the flooring planks/tiles to ensure efficient installation and minimize waste.

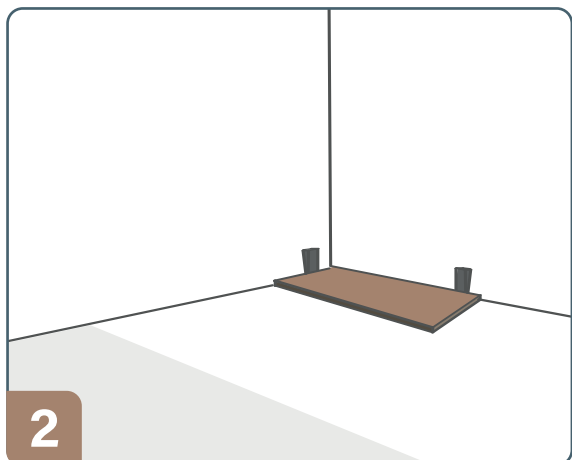


Flooring requires an expansion gap approximately 8mm (spacers may be used). The first plank/tile should be installed in the top left corner of the room working towards the window (if applicable).

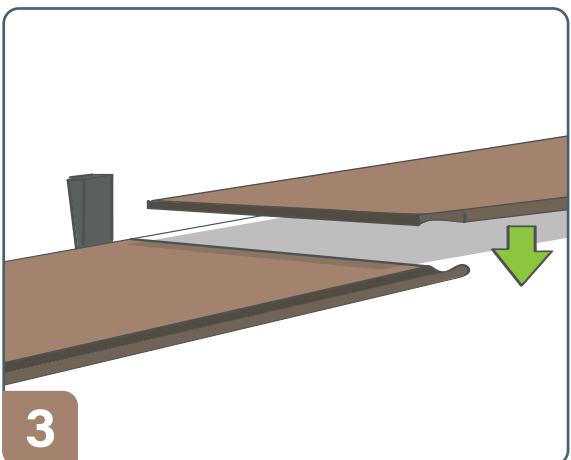


Install the flooring in rows by joining the left short edge of the next plank/tile to the right short edge of the previous plank/tile. The flooring is joined by the one-piece drop-lock system. Lay the panel in position and install by simply pushing down. Be careful not to apply excessive force that may cause damage. We recommend pushing down by hand, alternatively a rubber mallet may be used with caution.

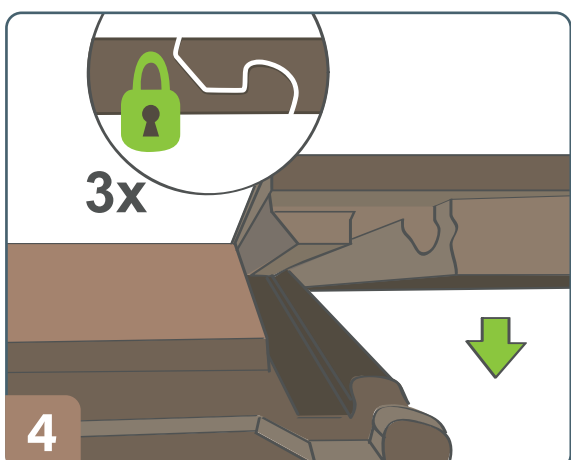

Repeat this procedure for each subsequent plank in the first row and cut the last plank/tile to size if required. After installation of the first row, if planned correctly, use the off-cut from the last plank/tile from the first row to begin installation of the second row. If there is not an adequate off-cut to begin the next row, cut one full length plank/tile to ensure that each row is staggered.

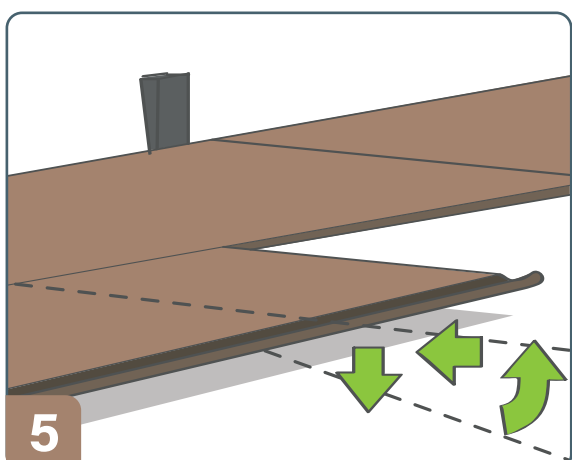

Install the first plank/tile of the second row by inserting, at a raised angle, the tongue on the long edge into the groove of the first row. Push into position and lower the plank/tile to sit flat. Use a tapping block and rubber mallet to lightly tap the long edge of the new plank/tile to lock into position.

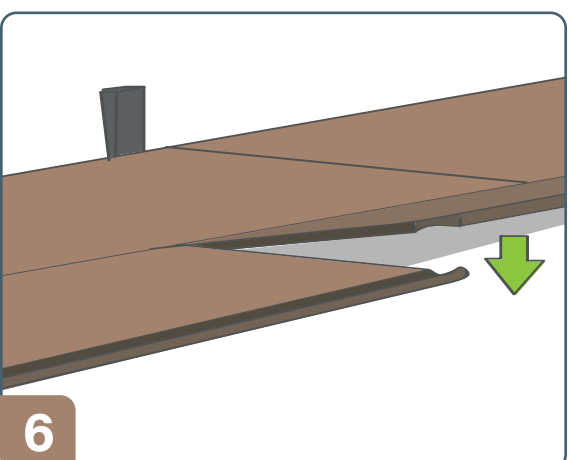

Line up the next plank/tile so that the one piece drop-lock system on the short edge lines up with the one-piece drop-lock system on the short edge of the previously installed plank/tile. Raise the plank/tile at an angle and insert the tongue on the long edge into the groove of the first row (similar to the previous step).

Push into position and lower the plank/tile until the left hand side short edge is sitting on top the right hand side short edge of the previously installed plank/tile. Apply pressure, or gently use a dead blow hammer, to push/tap down on the short edge joint and lock into position. Repeat this process to install the remaining planks/tiles.



MAINTENANCE

Sweep and/or vacuum the floor to remove all loose dirt and grit.
Mop the floor using a properly diluted non-abrasive cleaner in cool water.
Rinse the floor thoroughly with clean water, remove any excess and allow it to dry.

UNDER FLOOR HEATING

OAK LEGENDS flooring is not compatible with ALL types of under flooring heating.
Please consult prior to installation as failure to do so may invalidate your warranty.

**DO NOT USE
STEAM MOPS OR
ABRASIVE CLEANERS**



PROTECTION

- DO NOT expose your Oak Legends flooring to temperatures exceeding 60°
- DO NOT use Oil or petroleum-based products as these can result in surface staining.
- Furniture with castors should have wide, rubber castors to avoid damaging the floor.
- DO NOT use ball type castors as they can damage the floor.
- Protective & non-staining mats are required under office chairs, heavy furniture and appliances.
- Apply felt pads to the underside of furniture legs/feet to prevent scratching the floor.
- Use door mats at entrances to prevent dirt and grit from being tracked on to the floor.

YOUR LOCAL SUPPLIER IS



BUILDING & GARDEN PRODUCTS

www.ffbg.co.uk | sales@ffbg.co.uk | 0141 378 7570
UNIT 2 | ASHLEY DRIVE | BOTHWELL
GLASGOW G71 8BS

scan to visit our website



www.ffbg.co.uk

part of the Fit & Forget family

